




# Arm-mounted luminaire SPOT LED

## MCBFL 3 N

112463007-00091662

# Waldmann **W**

ENGINEERS OF LIGHT

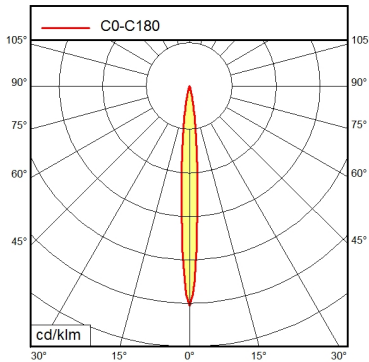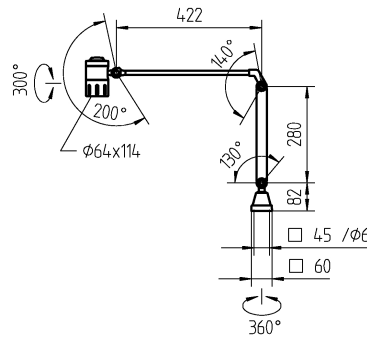

**light source**  
**work equipment**  
**connected load**  
**power consumption**  
**luminous flux**  
**luminous efficiency**  
**light type/-color**  
**colour temperatur**  
**color rendering index**  
**light distribution**  
**system of protection**  
**class of protection**  
**technology**  
**operation**  
**housing**  
**cover**  
**arm**  
**weight (net)**  
**mains lead**  
**fastening**  
**accessory**  
**maximum ambient temperature**  
**special features**

LED  
 electronic plug-in transformer  
 100 - 240 V; Wechselstrom (AC); 50 Hz; 60 Hz  
 ca. 7 W  
 approx. 400 lm  
 approx. 57 lm/W  
 daylight  
 approx. 5.400 K  
 CRI > 72  
 narrow-beam; direct  
 IP 20  
 II  
 switchable; no notice  
 rotary switch  
 aluminium; anodised; black  
 borosilicate  
 black  
 ca. 1,7 kg  
 ca. 3,5 m; mains plug; CEE 7/XVI; BS 1363; NEMA 1-15P  
 table clamp (accessory); wall bracket (accessory); screw-down flange; magnetic base (accessory)  
 Interchangeable mains plug  
 25 °C  
 Spot with a 10° angle of radiation