
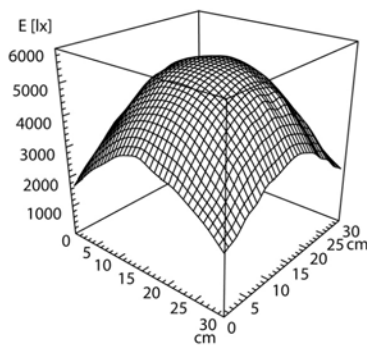
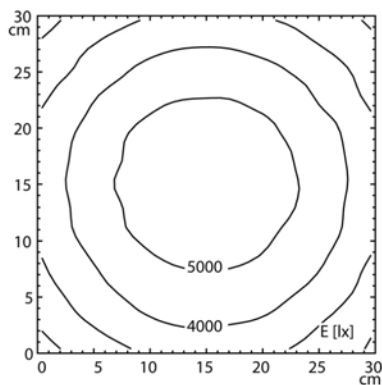



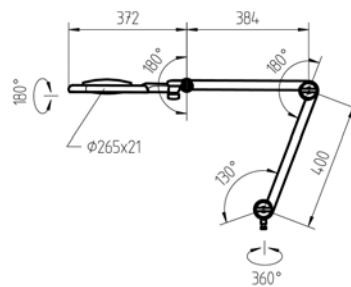

light source
work equipment
connected load
power consumption
luminous flux
luminous efficiency
light type/-color
colour temperatur
color rendering index
light distribution
direct ratio
chromaticity tolerance LED
system of protection
class of protection
technology
operation
housing
cover
arm
balance of articulation joints
weight (net)
mains lead
fastening
lens, dimensions
lens material
lens, diopters
add-on lens
add-on lens, diopters
special features

LED
electronic plug-in ballast
100 - 240 V; Wechselstrom (AC); 50 Hz; 60 Hz
ca. 13 W
approx. 750 lm
approx. 57 lm/W
cold white
approx. 4.000 K
CRI > 90; R9 > 50
direct
approx. 100 %
< 3 SDCM
IP 20
II
multi-stage switchable; continuously dimmable;
Touch DIM
multi-function switch
plastic; untreated; black
Polyamide; milky
tubular aluminium section; anodized; aluminium
coloured anodised
spring
ca. 2,5 kg
ca. 3,6 m; mains plug; CEE 7/XVI; BS 1363; NEMA
1-15P
screw-down flange
Ø 160 mm
glass
3,5
Ø 31.5 mm
8
adhesive add-on magnifier; light characteristic can
be adjusted with a three-way switch