
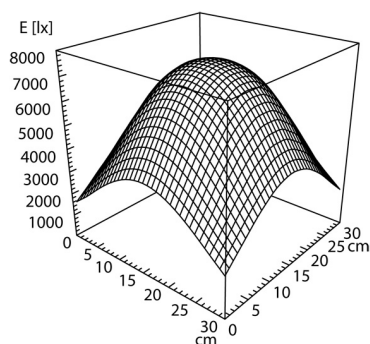


CEE 7/VII

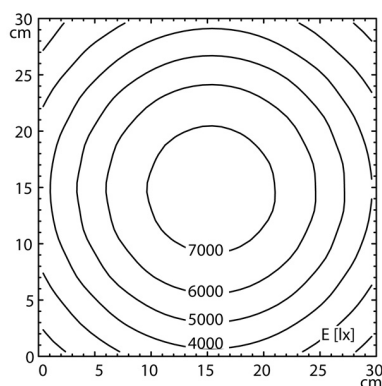

Light source

Work equipment

Connected load

Secondary tension

Power consumption

Sec. power consumption

Luminous flux

Luminous efficiency¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

System of protection/Class

Technology

Operation

Housing

Light source cover

Arm

Balance of articulation joints

Mains lead

Fastening

Lens, dimensions

Lens material

Diopter lens

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

LED

Electronic transformer

100 - 240 V; AC; 50 Hz; 60 Hz

24 V

approx. 16 W

approx. 14 W

approx. 950 lm

approx. 67 lm/W

Cold white

approx. 4.000 K

CRI ≥ 90; R9 ≥ 50

Direct; approx. 100 %

< 4 SDCM

Diffusor

IP 20; I with plug-in power supply; III without plug-in power supply

Multi-stage switchable; Continuously dimmable;

Touch DIM

Multi-function switch

Plastic; ESD-version; Black

Polyamide; Milky

Tubular aluminium section; ESD-coat of lacquer;

Black

Spring

approx. 3,5 m; Mains plug; CEE 7/VII

Screw-down flange; Table clamp

Ø 160 mm

Glass

3,5 DPT

4013330014575

2,6; approx. 4,1 kg

approx. 760 mm; 390 mm; 190 mm

Ra (luminaire) ca. 90; ESD version; Light characteristic can be adjusted with a 3-way switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear