


Flexible-tube luminaire SPOT LED MCTFL 3 N

112462009-00091970

Waldmann **W**


ENGINEERS OF LIGHT



CEE 7/XVI

BS 1363

NEMA 1-15P

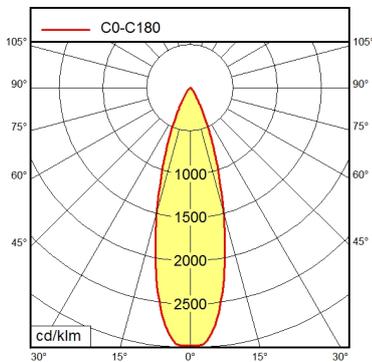

light source
work equipment
connected load
power consumption
luminous flux
luminous efficiency
light type/-color
colour temperatur
color rendering index
light distribution
system of protection
class of protection
technology
operation
housing
cover
arm
weight (net)
mains lead
fastening
accessory
maximum ambient temperature
special features

LED
 electronic plug-in transformer
 100 - 240 V; Wechselstrom (AC); 50 Hz; 60 Hz
 ca. 7 W
 approx. 460 lm
 approx. 65 lm/W
 daylight
 approx. 5.400 K
 CRI > 72
 wide beam; direct
 IP 20
 II
 switchable; no notice
 rotary switch
 aluminium; anodised; black
 borosilicate
 black
 ca. 1,5 kg
 ca. 2,7 m; mains plug; CEE 7/XVI; BS 1363; NEMA 1-15P
 table clamp (accessory); wall bracket (accessory); screw-down flange; magnetic base (accessory)
 Interchangeable mains plug
 25 °C
 Flood with 40° angle of radiation